



US 20110139116A1

(19) **United States**(12) **Patent Application Publication**  
**Herbruck**(10) **Pub. No.: US 2011/0139116 A1**(43) **Pub. Date: Jun. 16, 2011**(54) **ROTARY, INTERNAL COMBUSTION ENGINE**(52) **U.S. Cl. .... 123/244; 123/90.39**(76) **Inventor: Steve Herbruck, Ojai, CA (US)**(57) **ABSTRACT**(21) **Appl. No.: 12/637,595**

A rotary engine has a rotor that has rockers pivoting in chambers. As each rocker pivots, it rotates an outer crankshaft. Each outer crankshaft has a spur gear that engages a stationary ring gear. Spur gear rotation causes the gears and the outer crankshafts to revolve around the ring gear. This cause the rotor to rotate. As the rotor rotates, successive chambers are positioned at the intake, compression, ignition, and exhaust positions. Igniting the fuel in the ignition position pushes the rocker inward to rotate the outer crankshaft associated with that rocker to cause the rotor to rotate.

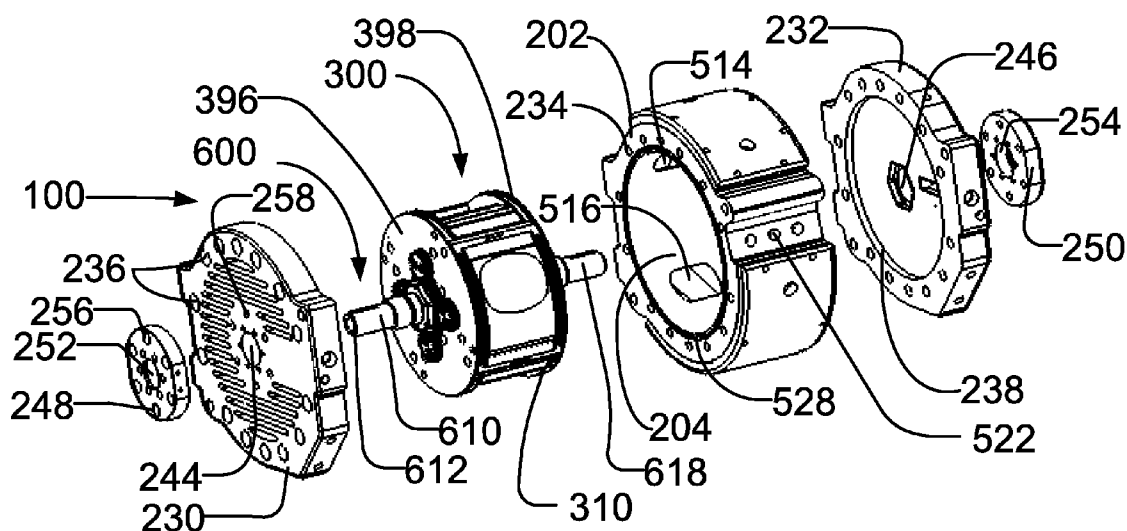
(22) **Filed: Dec. 14, 2009****Publication Classification**(51) **Int. Cl.**  
**F02B 53/00** (2006.01)  
**F01L 1/18** (2006.01)

Fig. 1

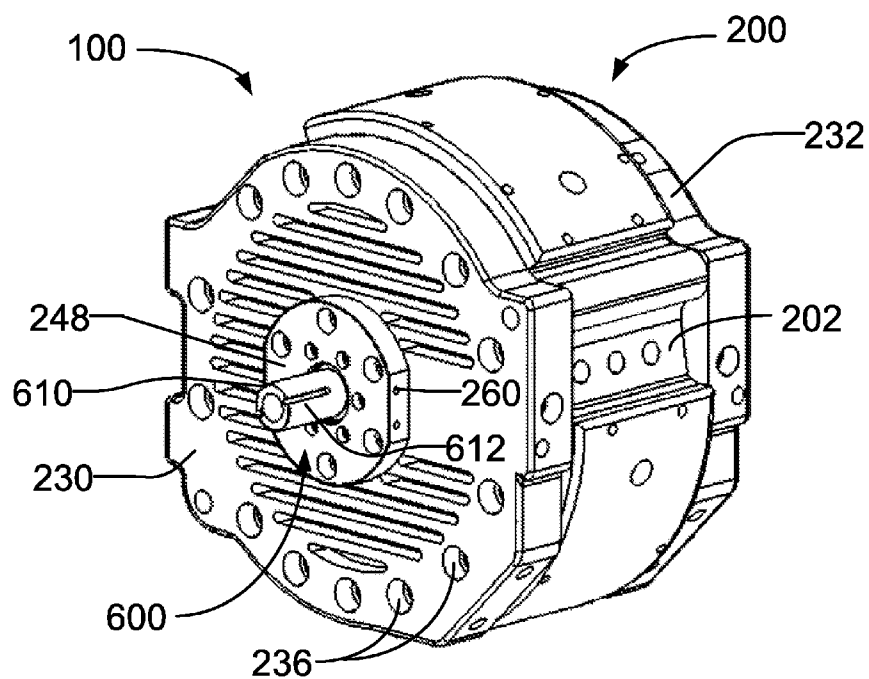
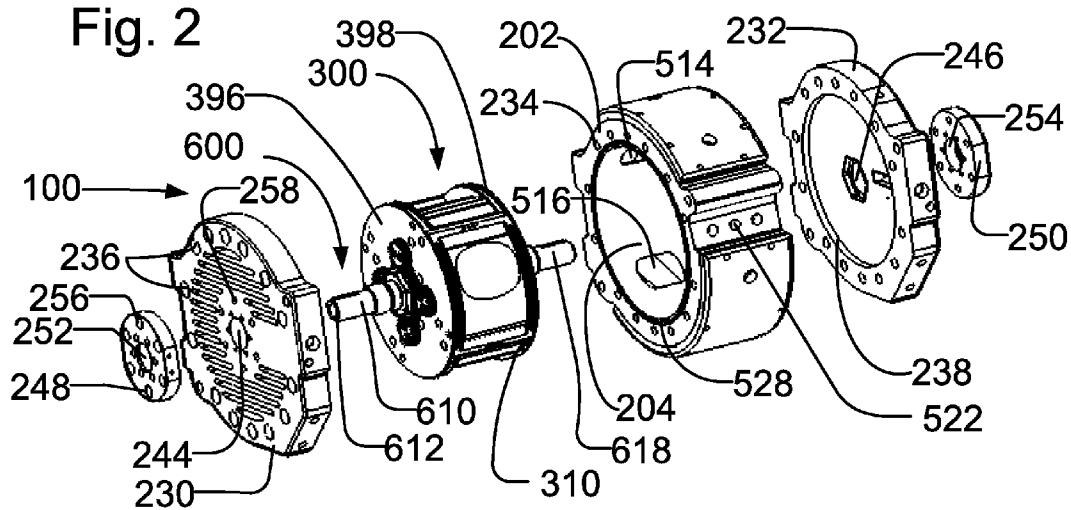


Fig. 2





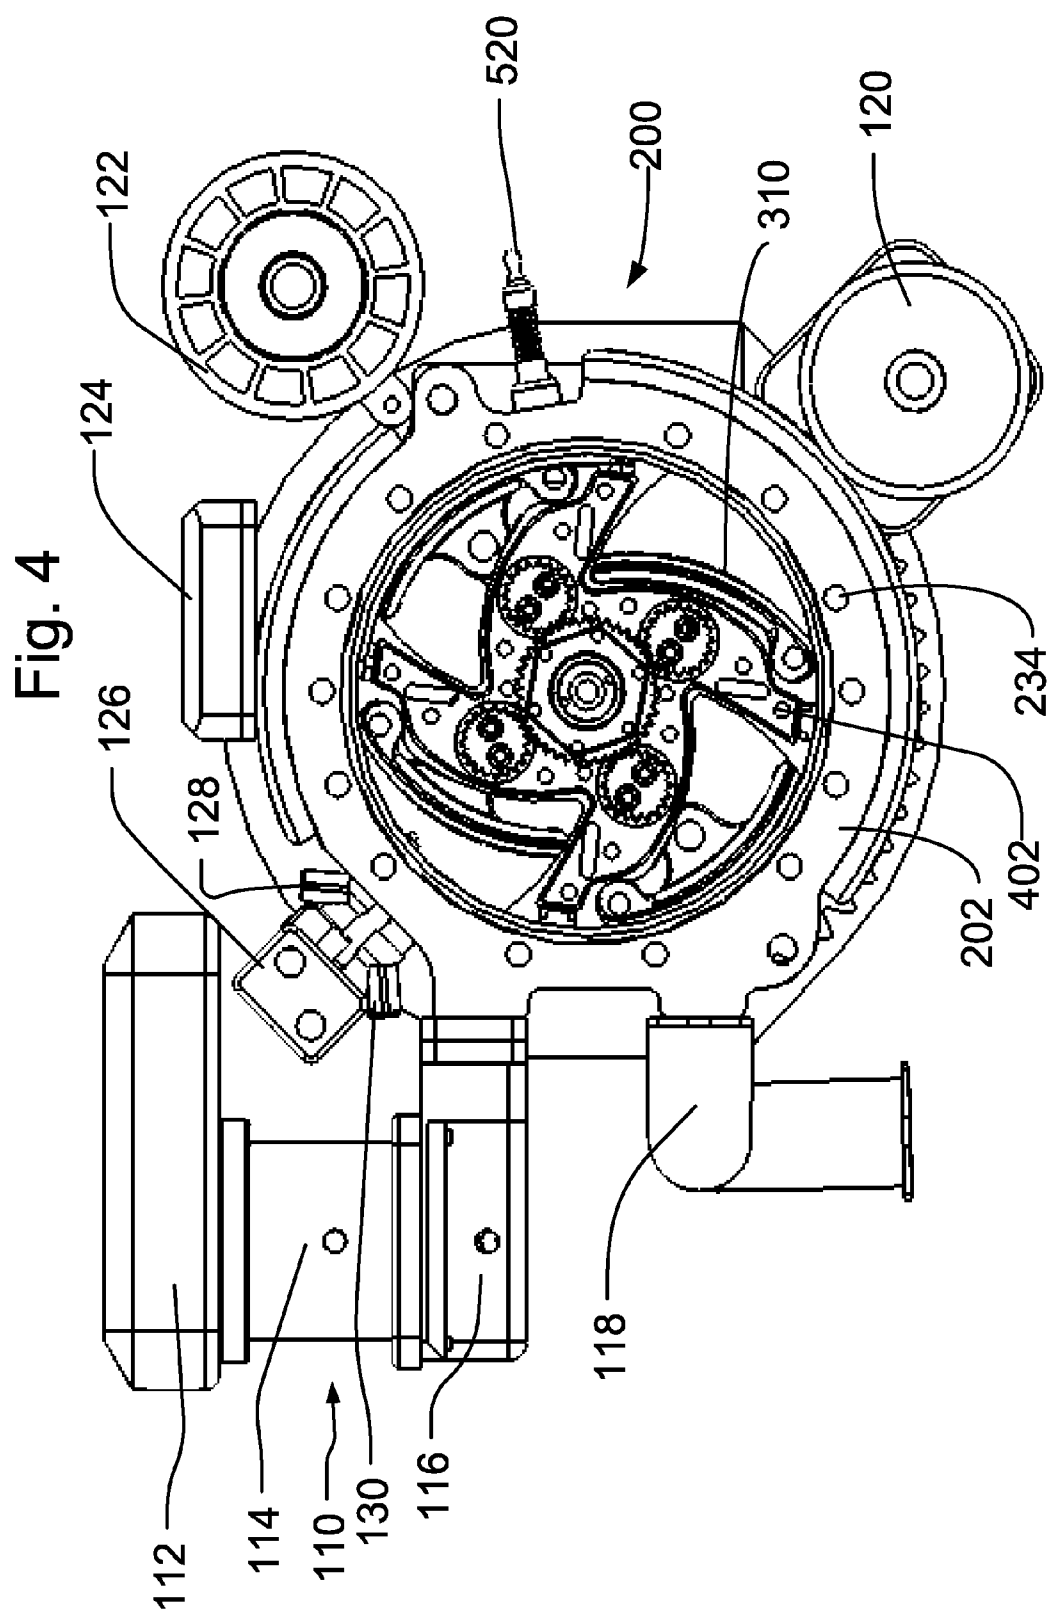
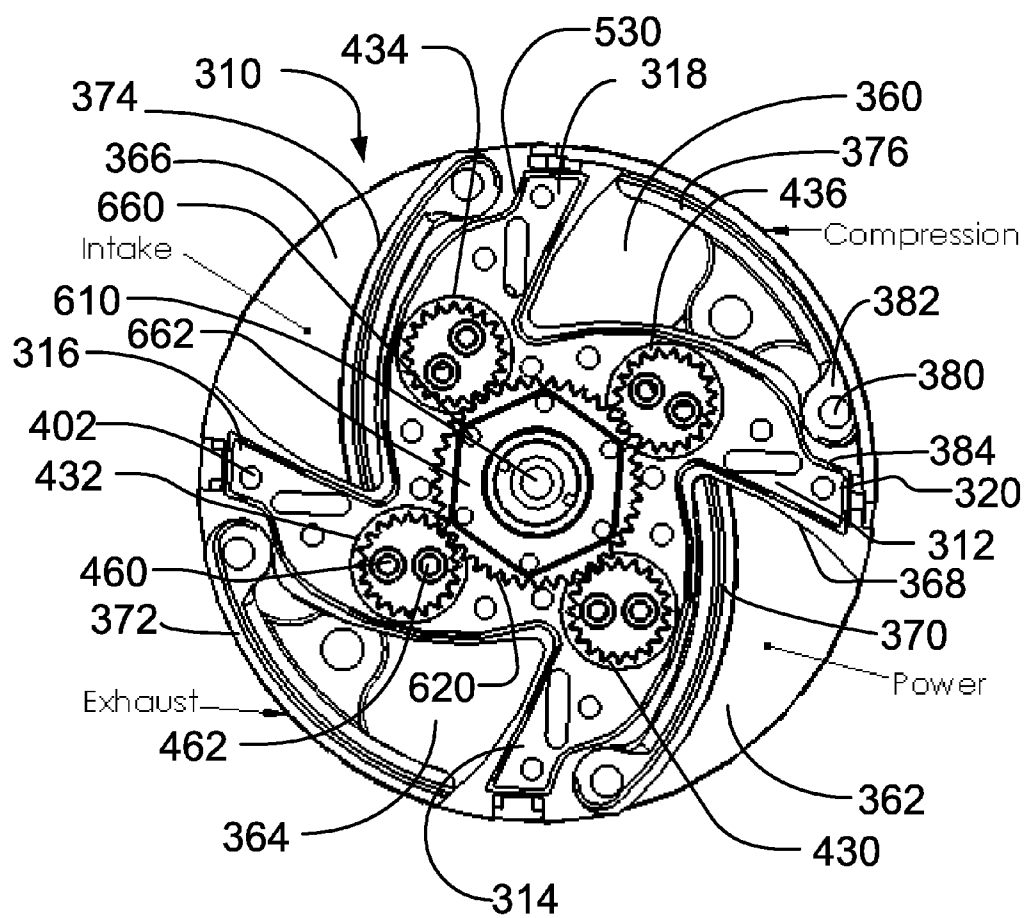


Fig. 5



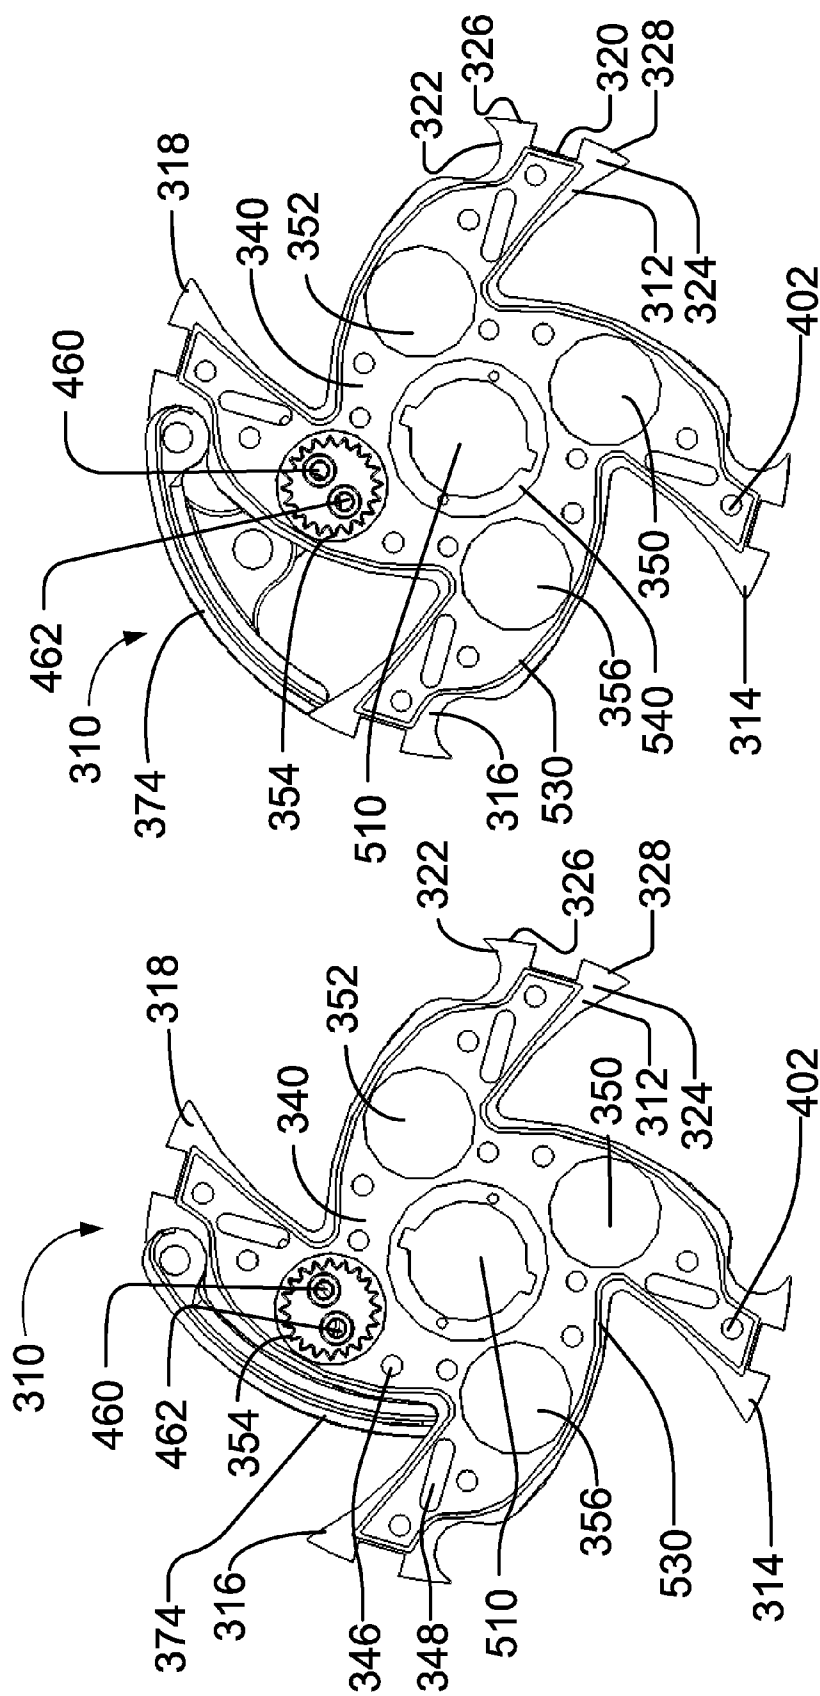


Fig. 6b

Fig. 6a

Fig. 7

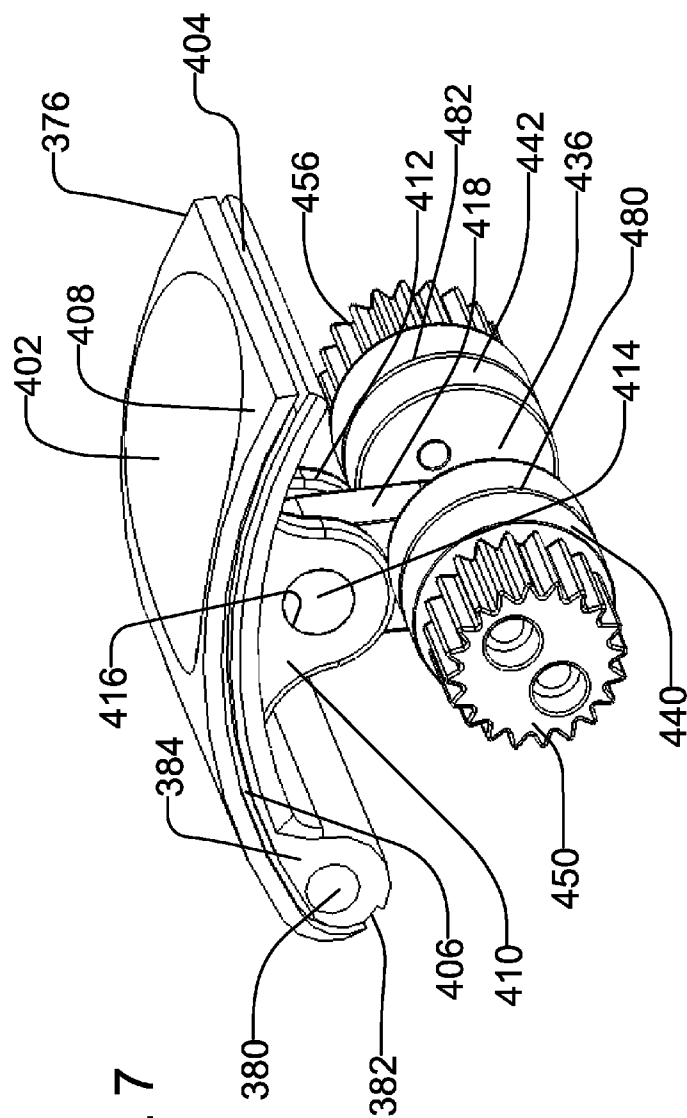
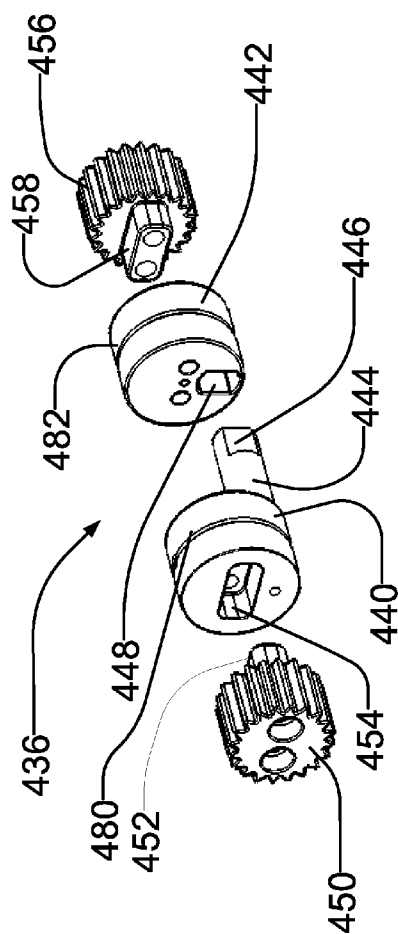


Fig. 8



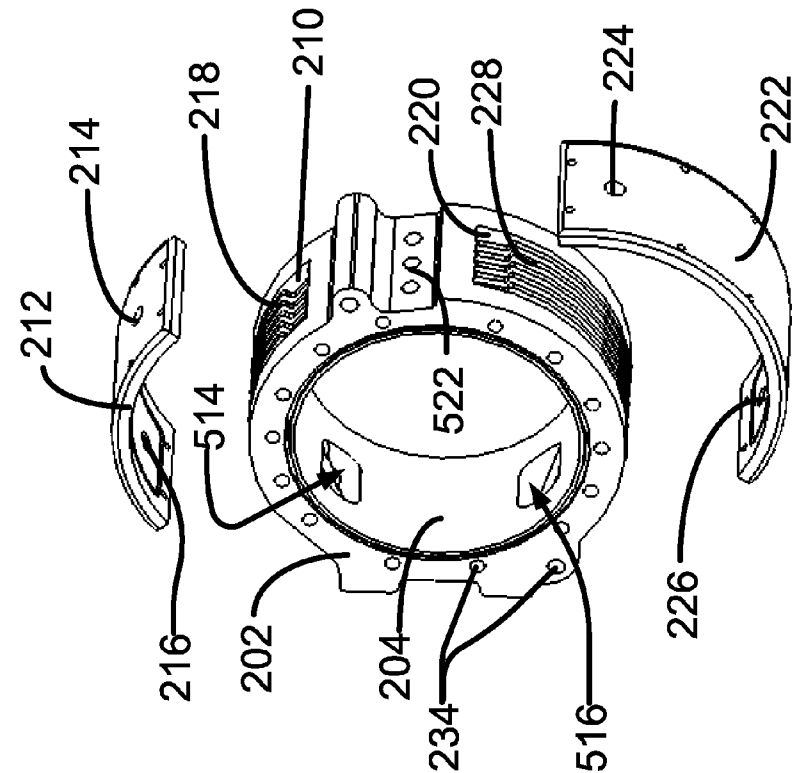


Fig. 10

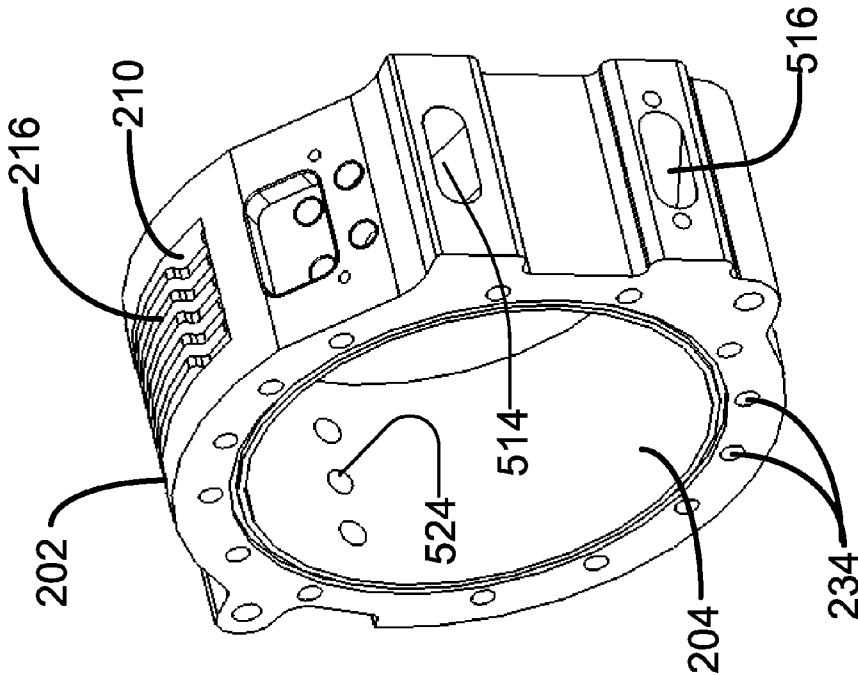


Fig. 9

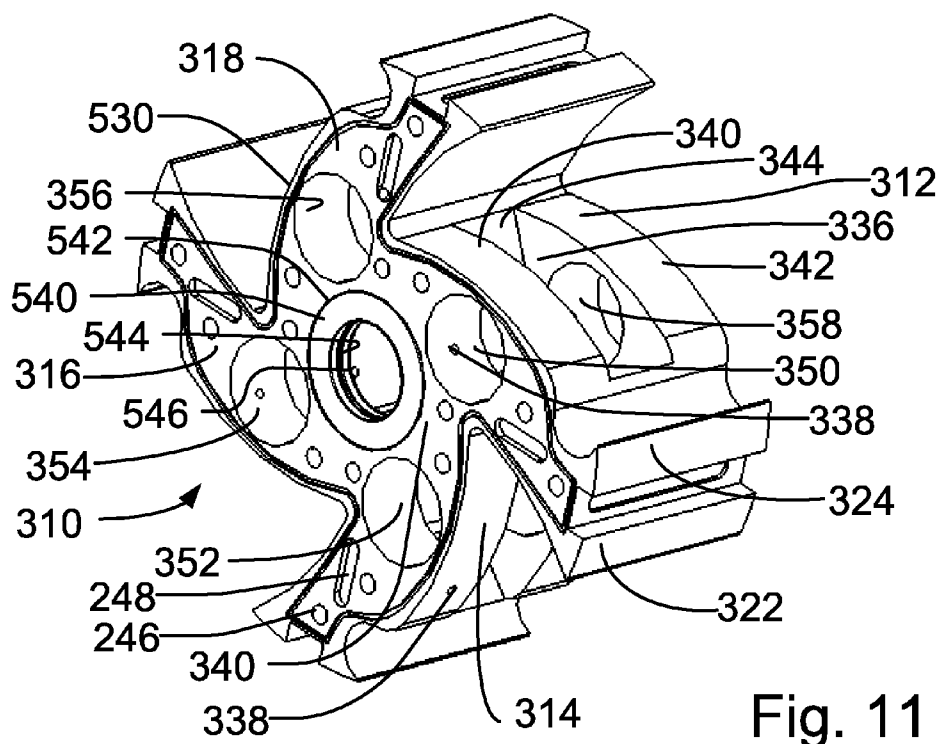


Fig. 11

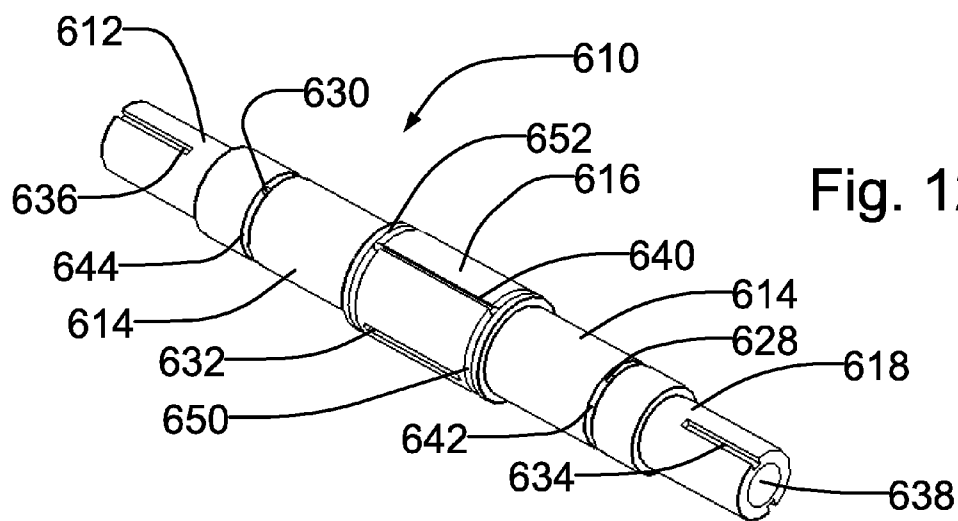
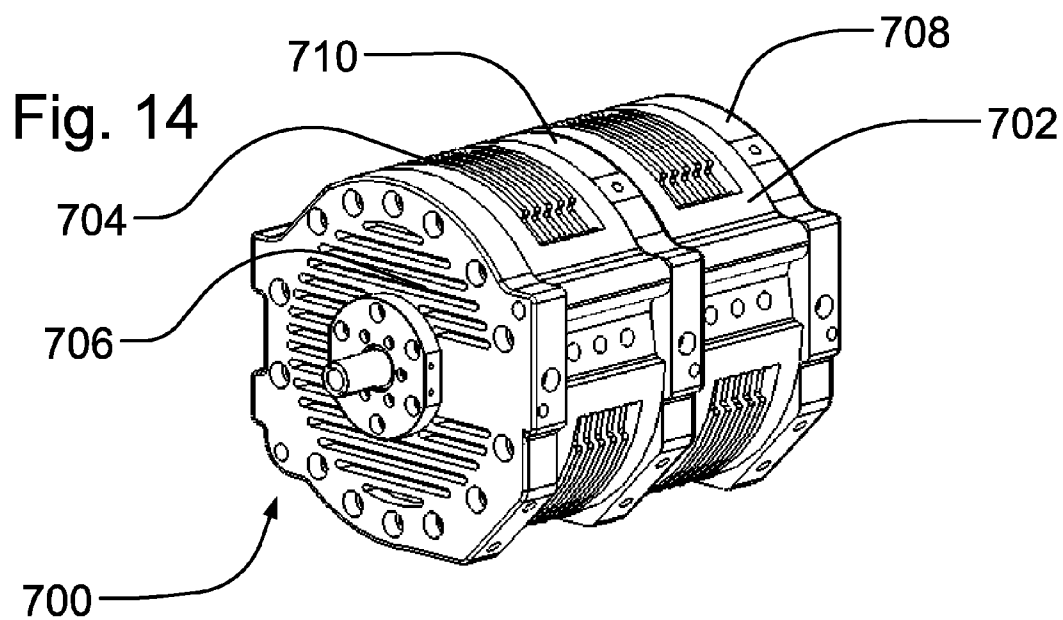
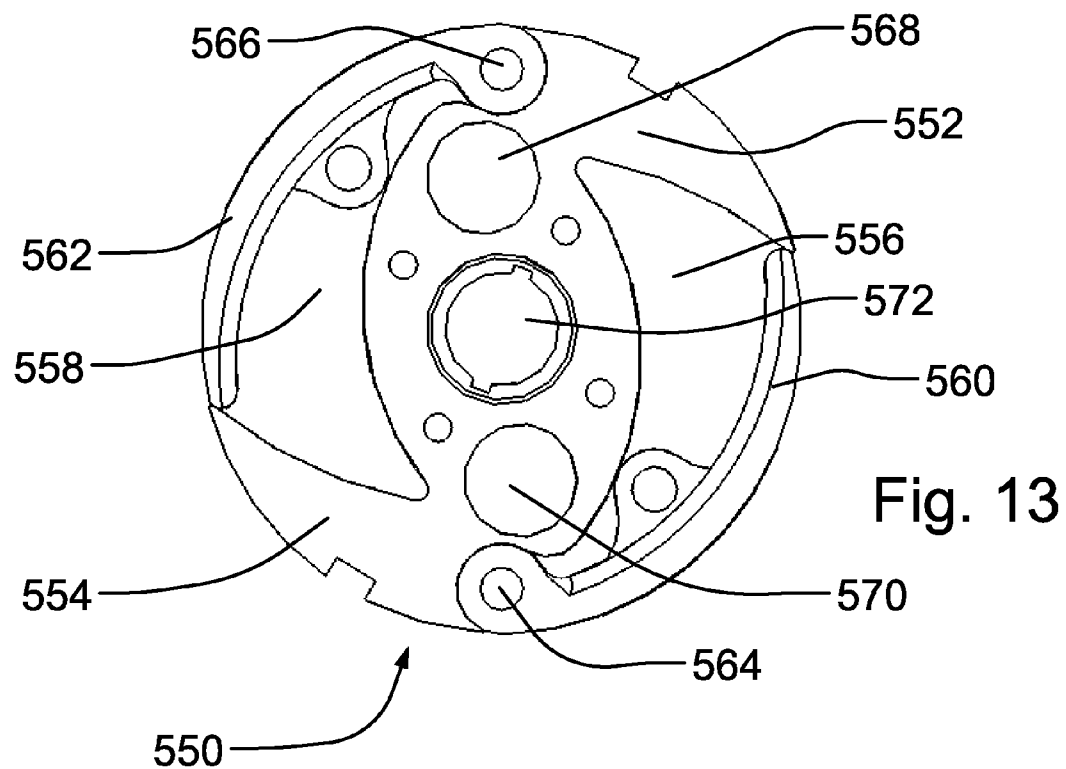


Fig. 12



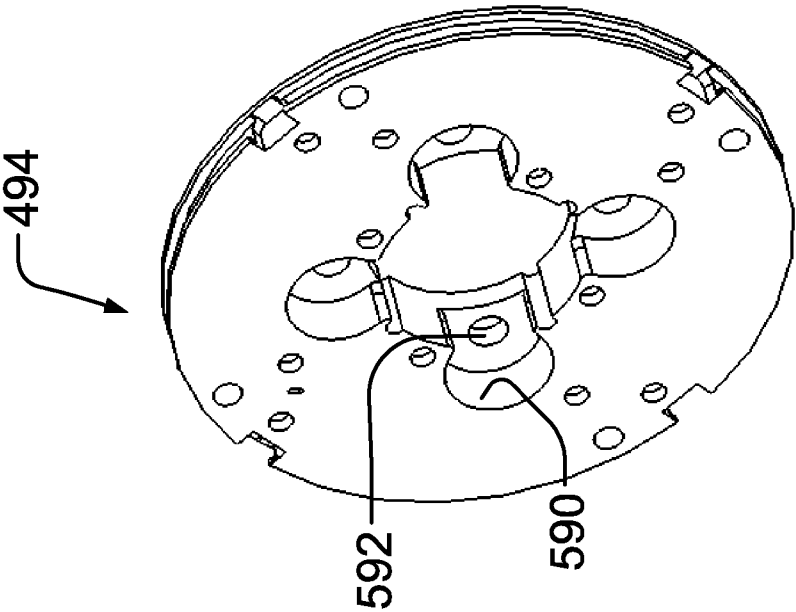


Fig. 16

Fig. 15

Fig. 17

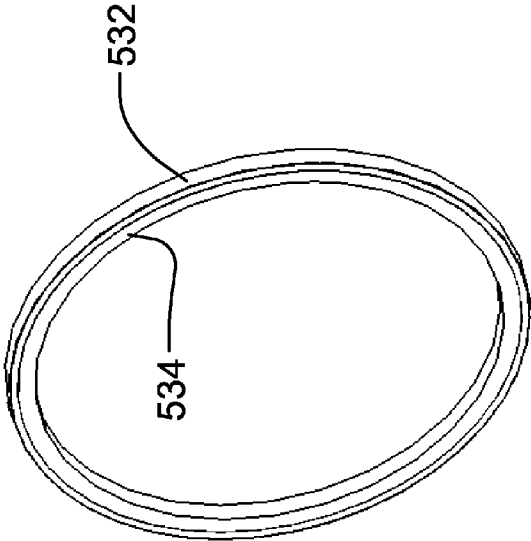
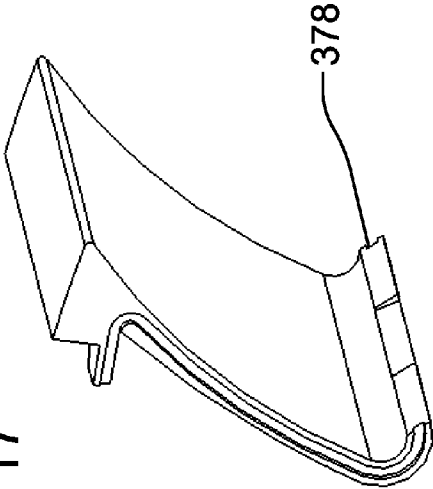
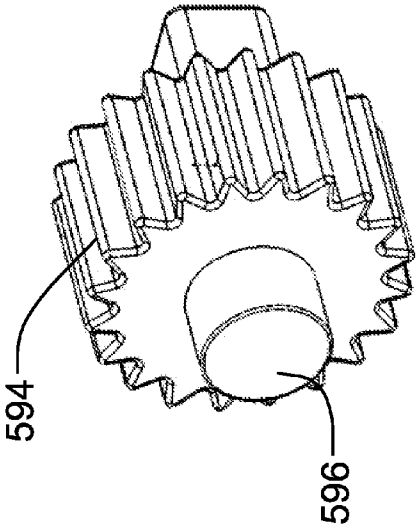


Fig. 18

Fig. 20



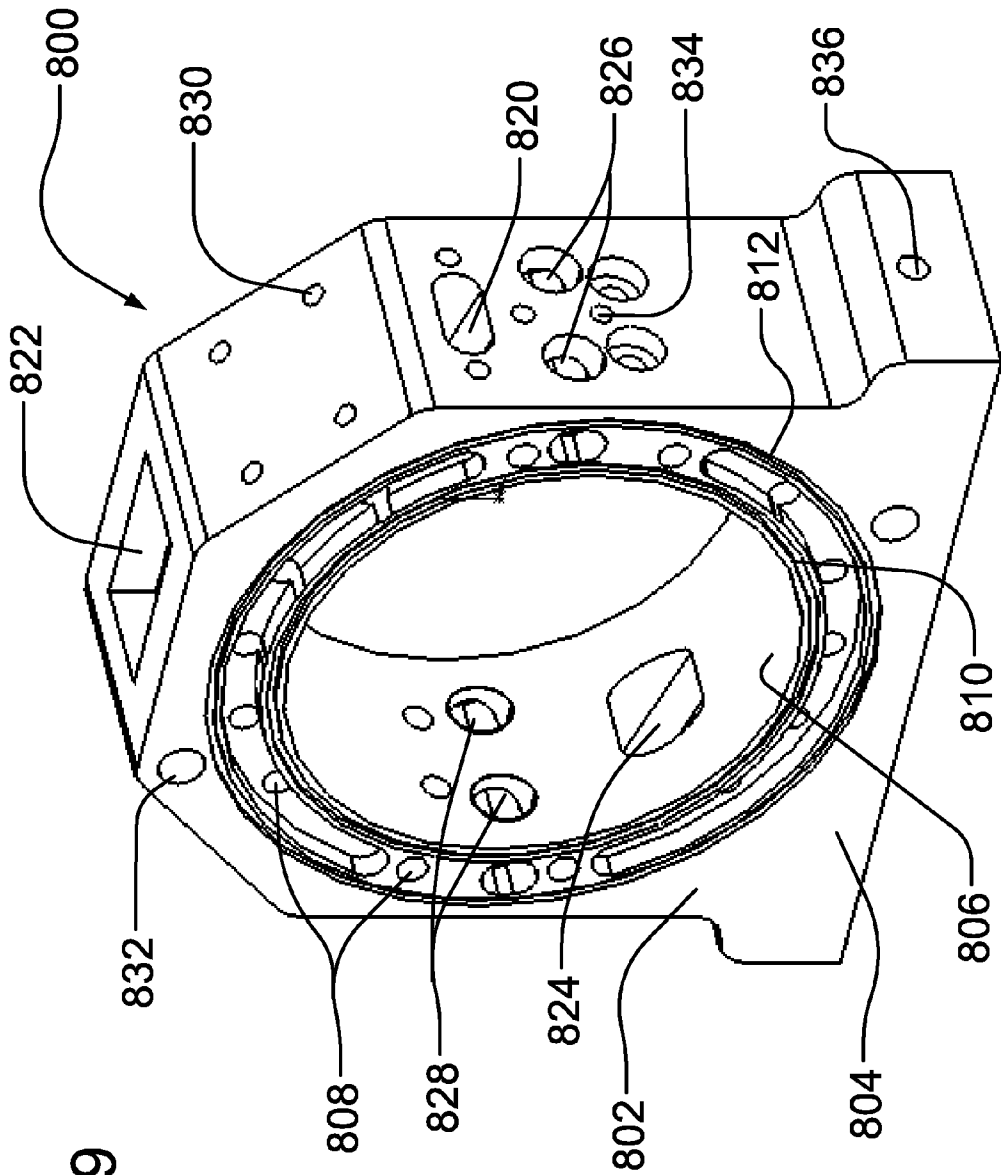
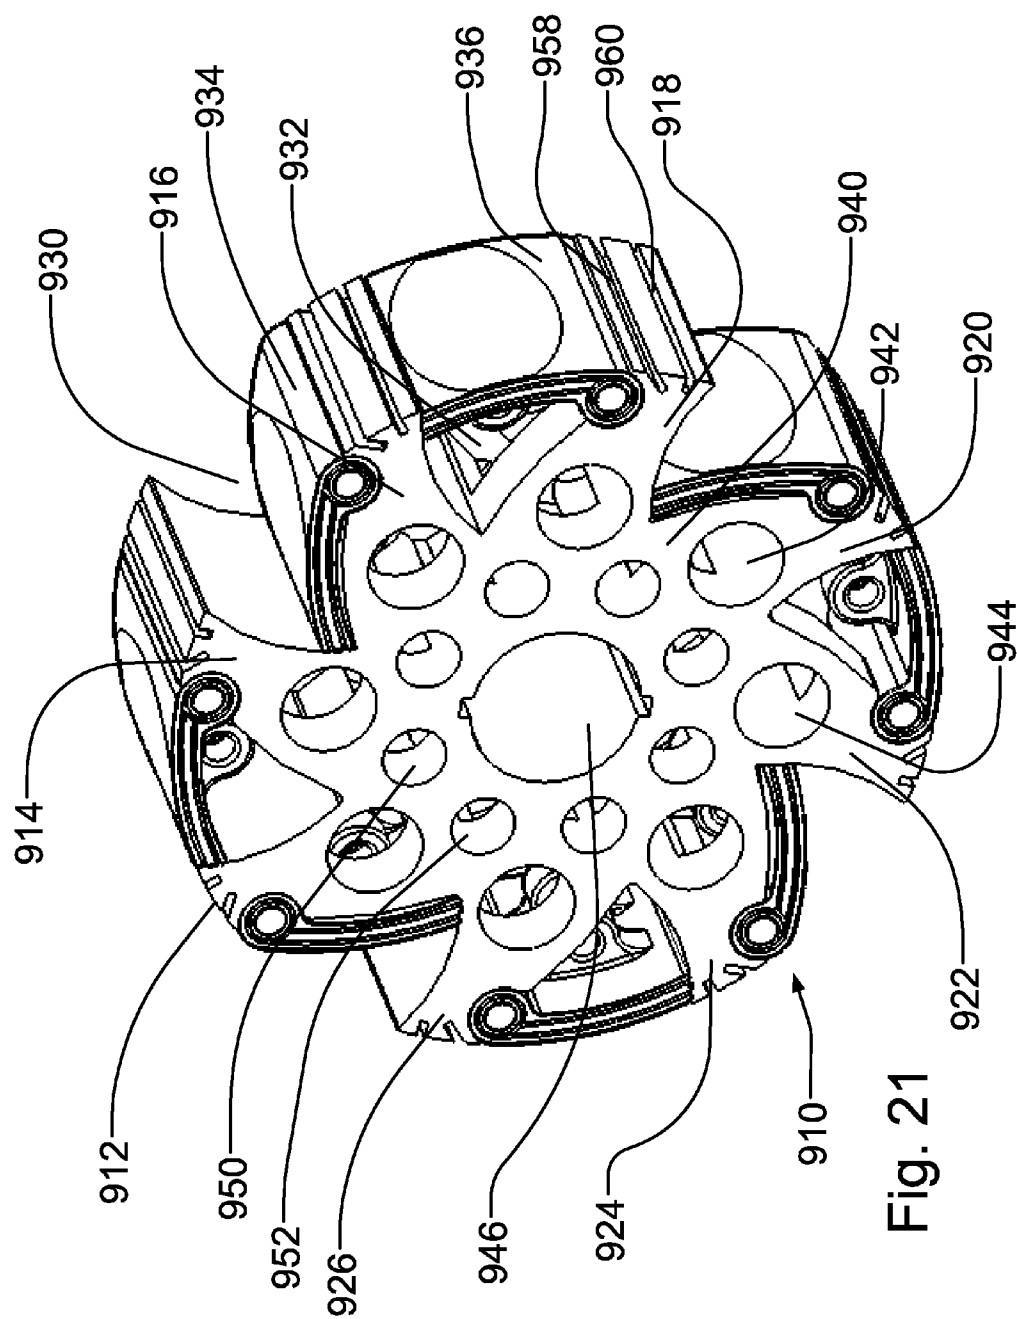


Fig. 19



**ROTARY, INTERNAL COMBUSTION ENGINE****NOTICE OF COPYRIGHTS AND TRADE DRESS**

**[0001]** A portion of the disclosure of this patent document contains material that is subject to copyright protection. This patent document may show or describe matter that is or may become trade dress of the owner. The copyright and trade dress owner has no objection to the facsimile reproduction by anyone of the patent disclosure as it appears in the Patent and Trademark Office patent files or records, but otherwise reserves all copyright and trade dress rights whatsoever.

**BACKGROUND**

**[0002]** 1. Field

**[0003]** Rotary, internal combustion engines.

**[0004]** 2. General Background and State of the Art

**[0005]** Internal combustion engines burn fuel in their combustion chambers in the presence of oxygen (usually from air). Burning generates high temperature and pressure gases, which expand and apply force against movable engine parts. Movement of the parts produce mechanical energy. Thus, an internal combustion engine converts potential chemical energy in the fuel into kinetic mechanical energy. Therefore, they provide the power for practical mechanical work to move vehicles and run pumps and other equipment.

**[0006]** Internal combustion engines fall into two principal categories, intermittent and continuous. Piston engines, either four-stroke and two-stroke, are the most common intermittent engines. Less common rotary engines also are intermittent. Continuous combustion engines include gas turbines and jet engines.

**[0007]** Internal combustion engines find their most common use in vehicles including cars, trucks, busses, airplanes and ships. The ratio of the potential chemical energy of the fuel (normally gasoline or diesel fuel) to the weight of the fuel is high. Consequently, internal combustion engines can travel long distance while carrying all their fuel.

**[0008]** Gasoline piston engines are among the least efficient internal combustion engine, only about 25%-30% efficient. Direct injection diesel engine may be about 40% efficient, at least at lower RPMs. Gas turbines are among the most efficient—approximately 60% efficient at high revolutions. However, gas turbines are inefficient at low revolutions. Because most land vehicle engines operate close to idle or well below maximum RPM, gas turbines usually are impractical for most land vehicles.

**[0009]** Rotary internal combustion engines surfaced in the early 1900s. See Hanley, U.S. Pat. No. 1,048,308 (1912). The Wankel rotary engine, which was developed beginning in the 1960s, became commercialized. See U.S. Pat. Nos. 2,938,505, 3,306,269, 3,373,723, 3,793,998, 3,855,977, 3,923,013 and 4,072,132. The Wankel engine is an internal combustion engine that uses a rotary design instead of reciprocating pistons to convert the energy of expanding combustion gases into rotating motion. Its four-stroke cycle takes place in a space between the inside of an oval-like epitrochoid-shaped housing and a rotor that is similar in shape to a Reuleaux triangle. The public often refers to the Wankel engine as the “rotary engine,” but rotary engines may have other constructions.

**[0010]** Internal combustion engines compress an air-fuel mixture in a combustion chamber and ignite the fuel by an

electric spark or ultra high compression. The resulting combustion expands the gases to transform chemical energy into mechanical energy.

**[0011]** The combustion chamber in a gas turbine is between two sets of opposing fan blades. The fan blades compress the air mixture. When fuel is introduced and ignited, the combustion products expand against downstream fan blades causing the blades to rotate. The energy from the blade rotation drives the vehicle or other device.

**BRIEF DESCRIPTION OF THE DRAWINGS**

**[0012]** FIG. 1 is perspective view of the rotary engine.

**[0013]** FIG. 2 is an exploded view of the rotary engine.

**[0014]** FIG. 3 is an exploded view of the rotary engine's power module.

**[0015]** FIG. 4 is front cut-away view of the rotary engine.

**[0016]** FIG. 5 is a front view of the internal parts of the rotary engine's rotor.

**[0017]** FIGS. 6a and 6b are partial front views of the rotary engine's rotor.

**[0018]** FIG. 7 is perspective view of the rotary engine's rocker.

**[0019]** FIG. 8 is perspective view of the small crankshaft of the rotary engine.

**[0020]** FIG. 9 is a perspective front view of the housing of the rotary engine's rotor.

**[0021]** FIG. 10 is a perspective rear view of the housing of the rotary engine's rotor showing the cooling jackets.

**[0022]** FIG. 11 is a perspective view of the rotary engine's rotor.

**[0023]** FIG. 12 is a perspective view of the main crankshaft shaft.

**[0024]** FIG. 13 is a front view of a two-cycle rotor.

**[0025]** FIG. 14 is a perspective view of an engine using two rotary engines.

**[0026]** FIGS. 15 and 16 are perspective views of alternative ring plates of the rotary engine.

**[0027]** FIG. 17 is a perspective view of a replacement part for part of the rotor.

**[0028]** FIG. 18 is a perspective view of a seal used in the device.

**[0029]** FIG. 19 is a perspective view of a housing for a compressor used with the rotor.

**[0030]** FIG. 20 is a perspective view of an alternative spur gear.

**[0031]** FIG. 21 is a perspective view of another alternative rotor for the rotary engine.

**[0032]** When the detailed description discusses a reference numeral in one or more drawing figures, the element and reference numeral being discussed is visible in that drawing. The element also may be visible in other figures without its reference numeral to avoid crowding of reference numerals.

**SUMMARY**

**[0033]** A rotary engine has a rotor that has rockers pivoting in chambers inside an enclosed cylindrical housing. As each rocker pivots, it rotates an outer crankshaft. Each outer crankshaft has a spur gear that engages a stationary ring gear. Spur gear rotation causes the gears and the outer crankshafts to revolve around the ring gear. This causes the rotor to rotate.

**[0034]** As the rotor rotates, successive chambers are positioned at the intake, compression, ignition, and exhaust positions. In the intake position, the rocker pivots into its chamber

to draw the air-fuel mixture into the chamber. The rocker pivots outward in the compression position. Igniting the fuel in the ignition position pushes the rocker inward, and the rocker moves outward again in the exhaust position to exhaust the combustion products.

#### DETAILED DESCRIPTION

**[0035]** Rotary engine **100** (FIGS. **1** and **2**) has the following principal components: (1) housing **200** for housing other components and for mounting in a vehicle or other device; (2) power module **300** and output **600**. See FIG. **2**.

**[0036]** Housing **200** (FIGS. **1**, **4**, **9** and **10**) may include a generally cylindrical housing body **202** of 8620, 8514 or other steel alloy. Aluminum or other suitable materials also could be used. The housing has a cylindrical inner wall **204**. The inner wall also could be a steel insert inside an aluminum outer housing body.

**[0037]** The housing may be air- or water-cooled. If water-cooled, the housing body may have top and bottom water troughs **210** and **220** (FIGS. **9** and **10**). Top water jacket **212**, which covers the top water trough, has inlet **214** and outlet **216** (FIG. **10**). Likewise, bottom water jacket **222**, which covers the bottom water trough, has inlet **224** and outlet **226**. The inlets may receive coolant from a radiator or other heat exchanger, and the outlets return the coolant to the radiator. Hoses connecting the inlet and outlet to the radiator are not shown. The troughs may have vanes **218** and **228** of heat conductive material to transfer heat from the housing to the coolant. The vanes also may direct the coolant to flow from the inlet to the outlet. In addition, one could change the locations of the inlet and outlet.

**[0038]** Front plate **230** and rear plate **232** enclose housing **200** (FIGS. **1** and **2**). The plates may be **6061** aluminum or other suitable material. The terms “front” and “rear” are used with reference to the drawings, not necessarily with reference to a vehicle or another device in which the rotary engine mounts. Housing body **202** has circumferentially spaced bores extending into the front and back of the housing body. Only the bores **234** on the front are visible. See FIGS. **2**, **4**, **9** and **10**. Bolts or other fasteners (not shown) extend through corresponding holes **236** in the front plate and lock into the bores. Housing body **202** may have openings and ports that are discussed in more detail below.

**[0039]** The front and rear plates **230** and **232** may include an oil ring seal groove **238** (only shown on plate **232** in FIG. **2**). Corresponding ring seals (see seal **532** in FIG. **18**) seat in the ring seal grooves to create a seal when the plates attach to housing body **202**. Gaskets (not shown) also may seal the plates to the housing body. Other devices or systems may be provided to prevent galvanic corrosion due to the dissimilar metals.

**[0040]** Power module **300** mounts within housing body **202**. See FIGS. **2** and **4**. The power module includes rotary module or rotor **310** that rotates about an axis of rotation within the housing body. The rotor may be formed of 8620 or 8514 steel or ductile iron. The rotor may have four arms **312**, **314**, **316** and **318** (FIGS. **5**, **6a**, **6b** and **11**). The distal end of each arm, e.g., end **320** of arm **312** (FIGS. **5**, **6a** and **6b**), has two short, spaced-apart extensions **322** and **324** (FIGS. **6a** and **6b**). The outer faces **326** and **328** (FIGS. **3**, **6a** and **6b**) may have surfaces that conform to inside cylindrical wall **204** of housing body **202**. Pressure plates **330** (FIG. **3**), which may be 9254 steel, seat in the space between extensions **322** and **324**. Spring **332**, which may be made of Incoloy® alloy, urges

the pressure plate **330** to push seals **306** and **308** (FIG. **3**) to seal against the inside cylindrical wall. The pressure plate seals and the arm extensions such as extensions **322** and **324** seal the distal ends of the arms to the inside cylindrical surface of the housing body. Remaining arms **314**, **316** and **318** have similar arrangements.

**[0041]** Arms **312**, **314**, **316** and **318** may be formed from two plates **340** and **342** that extend outward from hub **344** (FIG. **11**) and form hollow space **336**. Only the plates that form arm **312** in FIG. **11** are numbered. The hollow space is used by outer crankshafts as described below. In addition, having spaced-apart plates may decrease rotor mass and increase efficiency.

**[0042]** Plates for arms **312**, **314**, **316** and **318** may have aligned bores. FIG. **11** shows bores **350**, **352**, **354** and **356** in plate **340**. Only bore **358** in plate **342** is visible. As FIGS. **6a** and **6b** show, bores **350**, **352**, **354** and **356** align with corresponding bores in plate **342**, which are not visible in FIGS. **6a** and **6b**.

**[0043]** The space between one arm and its adjacent arm and inside cylindrical wall **204** of housing body **202** forms a chamber. Thus, chamber **360** (FIG. **5**) is formed between arms **312** and **318**, and the spaces between arms **312** and **314**, **314** and **316** and **316** and **318**, form chambers **362**, **364** and **366**, respectively.

**[0044]** One of four rockers **370**, **372**, **374** and **376** mounts for pivoting in each chamber **360**, **362**, **364** and **366**. FIG. **3** shows rocker **376** exploded from the rotor, FIG. **5** shows all the rockers in relation to rotor **310**, FIGS. **6a** and **6b** shows only two rotors moved between different positions, and FIG. **7** shows details of the rocker. The rockers may be formed from 4032 aluminum or other appropriate material.

**[0045]** Pivot pin **380** extends through ridge **382** of each rocker (FIG. **7** and only numbered for rocker **376** in FIG. **5**). The ridge mounts in rounded portion **384** of each arm **312**, **314**, **316** and **318**. The outer surface of the ridge cooperates with the surface of the rounded portion to seal the ridge and rounded portion intersection as the rocker pivots. Added structure may be provided to enhance the seal at the ridge such as a sealing member **428** (FIG. **3**) in groove **382** (FIG. **7**). The rocker may have a front groove **404** and side grooves, only one of which, groove **406**, is visible FIG. **7**. Side compression seals **424** and **426** (FIG. **3**) mount in the side grooves and front compression seal **428** seats in the front groove. They may be 5254 steel. The side compression seals contact the inside of front ring plate **396** and rear ring plate **398** when the ring plates are mounted to the outside of rotor **310**. See FIG. **3**. The front compression seal contacts the rocker face of each rotor arm, e.g., face **368** of arm **312** (FIG. **5**). The rocker faces may be arcuate around the axis of each pivot pin. The rocker faces also close off the space between the two plates. Seals **306** and **308** (FIG. **3**) may seat in circumferential grooves **334** of ring plates **396** and **398** (only the groove in ring plate **396** is numbered). Each seal may have inward facing portions **504** and **506** (only the portions on seal **306** is numbered in FIG. **3**). The inward facing portions contact each other to form a seal. The inward facing portions may extend from the circumferential grooves though a notch in the ring plate, e.g., notch **508**. When the device is assembled, seals **306** and **308** seal the outside of chambers **360**, **362**, **364** and **366**.

**[0046]** One may want to change parts if face **368** (FIG. **5**) becomes damaged or worn. Therefore, the rotor may be designed to accept a replacement face on replacement **378** (FIG. **17**).

[0047] Front and rear ring plates 396 and 398 cover rotor arms 312, 314, 316 and 318, chambers 360, 362, 364 and 366 and rockers 370, 372, 374 and 376. See FIG. 3. The ring plates may be formed of ductile iron. Front ring plate 396 has four cutouts 484, 486, 488 and 490 (FIG. 3). Each aligns with one of the bores 350, 352, 354 or 356 in rotor arm 312, 314, 316 and 318 (FIGS. 6a and 6b). Rear ring plate 398 also has four cutouts 496, 498, 500 and 502 (FIG. 3). Each aligns with a cutout on the front ring plate.

[0048] The rockers' pivot pins such as pin 380 may extend into bores such as bores 394 on front ring plate 396 (FIG. 3) and to corresponding bores (not numbered) on rear ring plate 398. The ring plates may be formed of ductile iron. The pivot pins also could extend into recesses, which extend into but not through the ring plates. See also similar but recessed bores in alternative ring plates 492 and 494 in FIGS. 15 and 16. Bores 388, 390 and, 392 and the other unnumbered bores on the ring plate can be used for bolting front rotor ring plate 396 to rotor 310. Corresponding bolts or other fasteners attach rear ring plate 398 to the rotor. The fasteners (not shown) attach to threaded bores 386 (FIGS. 3, 4, 5, 6a and 6b) on rotor arms 312, 314, 316 and 318. The bores' positions used to attach the ring plates can vary. FIG. 3 shows two additional bores for those that are numbered. Thus, each ring plate could be attached by twelve fasteners (four sets of three fasteners) to the rotor.

[0049] For positioning by hand, dowels may be used to align appropriate holes, e.g., hole 388 in ring plates 396 or 398, with the appropriate bore 386. Automated assembly may use different techniques.

[0050] The following discussion uses rocker 376 as an example for all rockers 370, 372, 374 and 376. Rocker 376 may include two spaced-apart pin bosses 410 and 412 (FIG. 7), which may be integrally formed as part of the rocker. Rocker rod pin 414, which may be 4140 steel, extends through bores 416 in pin boss 410 (only one visible in FIG. 7). The rocker rod pin also extends through the upper bore 420 of link 418 (FIGS. 3 and 7). FIG. 3 also shows the link's lower bore 422. The link also may be 4140 steel.

[0051] Rockers 370, 372, 374 and 376 pivot about their respective pivot pins, e.g., pin 380 in rocker 376 (FIG. 5). Each rocker pivots between an outside position, which is close to inside surface 204 of housing body 202, to an inside position away from the inside surface and back to the outside position. Thus, in FIG. 5, rockers 370 and 374 are shown in the inside positions, and rockers 372 and 376 are shown in the outside positions. These positions are temporary because the rockers pivot in and out as described below.

[0052] Pivoting of each rocker 370, 372, 374 and 376 rotates a corresponding outer crankshaft 430, 432, 434 and 436 (7 and 8). Likewise, rotating an outer crankshaft pivots its corresponding rocker. The outer crankshafts may be made of 4140 steel. Though each could be formed of one piece, FIGS. 7 and 8 show the following parts comprising each outer crankshaft assembly. Crankshaft 436 includes front and rear wheels 440 and 442 (FIGS. 7 and 8). The front wheel includes rearward facing journal 444 that has a tang 446 at its end. The tang seats in tang receiver 448 in rear crank wheel 442 (FIG. 8). Front spur gear 450 includes a tang 452 that seats in tang receiving opening 454 in front wheel 440, and rear spur gear 456 also includes a tang 458 received within its tang receiving opening (not visible in FIG. 8) in rear crank wheel 442.

[0053] Bolts 460 and 462 (FIG. 5 (only two numbered) and FIGS. 6a and 6b) or other fasteners extend through the bolt

holes 464 and 466 in front spur gear 450 and through aligned holes 468 and 470 in front crank wheel 440, through aligned holes 472 and 474 in rear crank wheel 442 and into hole 476 and 478 in rear spur gear 456. Threads for engaging the bolts inside the rear spur gear are not visible. Consequently, the bolts secure the front spur gear, the front and rear crank assemblies and the rear spur gear together.

[0054] Front and rear wheels 440 and 442 of each outer crankshaft, e.g. crankshaft 436, may have an oil groove 480 and 482 (FIGS. 7 and 8) for lubricating the wheels. The oil grooves may receive lubricant from oil feed 338 (FIG. 11). The oil feed may be angled for ease of machining. Alternatively, the oil feed could be straight by drilling it after drilling through arm plates 340 and 344.

[0055] Pressure from gases caused by ignition of fuel in the combustion chamber associated with rocker 376 pivots the rocker inward (i.e., right side moves downward in FIG. 7). Accordingly, the rocker drives link 418 against journal 444 of outer crankshaft 436, which rotates the crankshaft. The parts are dimensioned such that when the rocker reaches in innermost position, the crankshaft journal is at or near its bottom position. Continued rotation of the journal drives the rocker outward. If the rocker is in position other than being pushed by gas expansion and depending on the position of the rocker in its cycle, the crankshaft pulls or pushes the rocker.

[0056] Main crankshaft 610 is discussed before discussing the outer crankshafts' operation. The main crankshaft (FIGS. 2, 3, 5 and 12), which may be 4130 steel, provides power from the engine to power a vehicle or produce other useful work. The main crankshaft may be one piece, but the different diameter portions are described as if they were separate parts attached together. The main crankshaft may include a section 616 (FIG. 3), which has a larger diameter than intermediate diameter portions 614. Oil grooves 650 and 652 (FIG. 12) at the ends of the larger diameter section carries oil for lubrication. The main crankshaft also includes smaller diameter flanges 612 and 618 at the crankshaft's end. In addition, sleeve 616 includes a longitudinal keyway 632 (FIG. 12). Although FIG. 12 shows only one keyway, there can be more than one.

[0057] The longitudinal center of main crankshaft 610 may be hollow to transfer oil to outside the crankshaft and from one oil hole to another. For example, one or more oil distribution channels 640 (FIG. 12) may extend along the center, larger-diameter section 616 and connect with oil grooves 650 and 652. Likewise, one or more additional circumferential oil troughs 642 and 644 may extend around the outside of the main crankshaft's smaller diameter flanges 612 and 618. Oil feeds 628 and 630 may carry lubricant to the oil troughs. Flanges 612 and 618 may have keyways 634 and 636. The ends of the flanges form bolt holes 638, only one of which is visible in FIG. 12.

[0058] Thrust ring 540, which may be bronze, mounts in thrust ring cavity 542 in rotor 310 (FIGS. 6a, 6b and 11), and a corresponding thrust ring mounts on the other side of the rotor. Each thrust ring has a bore 544. Main crankshaft 610 may mount to the rotor as follows. It may be positioned inside cavity 542. The thrust rings are slid over the main crankshaft, and key 546 from each thrust ring engages keyway 640 of sleeve 616.

[0059] Main crankshaft 610 extends through ring gears 620 and 622 and ring plates 396 and 398. The ring gears may be 4140 steel. The main crankshaft mounts in bores (only bore 510 is visible in FIGS. 6a, 6b and 11) in the center of arm

plates **340** and **342**. The ring gears may be fixed against the insides of front plate **230** and rear plate **232** (FIGS. **1** and **2**). For example, the ring gears may be fixed to mounting plate **662** and bolts **660** may secure the ring gears and mounting plate to the front and rear plates. The ring gears also may be fixed to other structure.

[0060] The teeth of front spur gear **450** and rear spur gear **456**, which are associated with outer crankshaft **436** and rocker **376**, engage the teeth on ring gears **620** and **622**. Likewise, other spur gears on the other outer crankshafts, e.g., **432**, **434**, **436**, associated with the other rockers also engage the teeth on the front or rear ring gear. Because the ring gears are stationary, spur gear rotation causes the spur gears to revolve around the ring gears. The connection of the outer crankshafts including their spur gears to rotor **310** causes the rotor to rotate about the rotor's axis of rotation. That axis coincides with the main crankshaft's axis of rotation.

[0061] In the figures, the spur gears travel around the outside of the ring gear. The ring gear could be a planetary gear with internal teeth so that the spur gears would travel around the inside of such a gear. Further, although the drawings show spur gears engaging a ring gear, the gears could be replaced with other devices such as belts, chain drives and friction drives capable of driving or being driven through their interaction.

[0062] The ratio of the number of spur gear teeth to ring gear teeth can be modified. Doing so changes the angular distance that rotor **310** travels for each rotation of the spur gears, e.g., gears **450** and **456**.

[0063] Flanges **612** and **618** of main crankshaft **610** may extend through bores **244** and **246** in front and rear plates **230** and **232** (FIG. **2**). Having only one flange protrude from housing **200** may be acceptable, however. The crankshaft flanges may extend through respective openings **252** and **254** of crankshaft collars **248** and **250**. Fasteners (not shown) through openings **256** in front crankshaft collar **248** engage bores **258** in front plate **230**, and corresponding fasteners secure the rear collar **250** to the rear plate. Those parts are unnumbered. See also FIG. **1**. Each collar may have seals (not shown) around the inside of openings **252** and **254**. A timing mark mount hole **260** (FIG. **2**) also may be provided.

[0064] Front and rear plates **230** and **232** may include oil ring seal groove **238** (only shown on plate **232** in FIG. **2**). Corresponding ring seals (only seal **532** is visible in FIG. **2** and shown in FIG. **18**) seat in the ring seal grooves to create a seal between the front and rear rotor ring plates **396** and **398** and the insides of front and rear housing plates **230** and **232** when those plates attach to housing body **202**. The ring plate seals may include an annular shoulder **530**, which faces and is in contact with the ring plates. The ring plate seals may be cast iron, silicon graphite, carbon fiber or other appropriate material. Springs (not shown) may bias the ring plate seals toward the front and rear ring plates.

[0065] Ring plate seals **532** remain stationary with respect to housing plates **230** and **232** during rotor rotation. Thus, the rotor's ring plates **396** and **398** slide on the ring plate seal. The ring plate seals have an rim shoulder **534** as FIG. **18** shows. Gaskets (not shown) also may seal plates **230** and **232** to the housing body. Other devices or systems may be provided to prevent galvanic corrosion due to any dissimilar metals being in contact with each other.

[0066] The ring plates could have different designs, and FIGS. **15** and **16** show two alternative designs for ring plates **492** and **494**. Outer face **580** includes boss **582**. The boss fits

into a corresponding indentation on the housing front or rear plate that would be modified from end plates **230** or **232** in FIG. **2**. Openings such as openings **584**, **586** and **588** may serve several functions. Openings **584** and **586** and corresponding holes in ring plate **494** are for fasteners (not shown) for attaching the ring plates to the rotor. Openings **590** and **592** (FIG. **16**) are for spur gear clearance and support. One opening in each quadrant may mount a pivot pin for the rotor's rockers. Instead of the cutout extending completely through the ring plates as cutout **484**, **486**, **488** and **490** extend in FIG. **3**, the cutouts in FIGS. **15** and **16** are recesses in the inside wall of the ring plate. See, for example, recess **590** in FIG. **16**. Spur gears **594** (FIG. **20**), mount in each recess. Bore **588** and **592** (FIGS. **15** and **16**) extends through the ring plate and receive hub **596** of the corresponding spur gear. A shaft would extend through the bore to connect a spur gear to the wheel of the outer crankshaft. Openings (not shown) also could be provided adjacent the spur gears for spraying lubrication onto the spur gears.

[0067] For the engine to operate, controlled amounts of air and fuel are injected through intake port **514** (FIGS. **9** and **10**) as rocker **374** (FIG. **5**) is pivoting inward. Electronic control may vary the amount of air and fuel or the air-fuel ratio. A turbocharger or supercharger could increase the volume of air (oxygen) through the intake port. As the spur gear on outer crankshaft **434** revolves about front ring gear **620** (and a corresponding spur gear revolves about rear ring gear **622**), the outer crankshaft rotates. The outer crankshaft's connection through a link to rocker **374** pivots the rocker inward. The inward pivoting causes a pressure decrease in chamber **366** (marked "input" chamber in FIG. **5**).

[0068] After chamber **366** receives a predetermined amount of air and fuel, rotor **310** rotation carries chamber **366** past intake port **514**. Further rotation of the rotor causes outer crankshaft **434** to begin pivoting rocker **374** outward. Because the drawings are not animated and the components remain stationary, consider that chamber **366** has moved to the position where chamber **360** had been in the drawings and that the reference numerals for the parts that had been there now are used. As rocker (now **376**) pivots outward, the decrease in volume in chamber **360** causes a corresponding pressure increase (compression) to the air-fuel mixture in the chamber above the rocker and in any recess **524** for a spark plug (discussed below).

[0069] The top surface of the rockers, e.g., rocker **376**, may be coated. The top surface has central combustion region **402** (FIG. **7**) surrounded by squish zone **408**. In a piston engine, a squish zone is a narrow section of a combustion chamber in which the air-fuel mixture is more compressed than in the rest of the chamber. A squish zone helps direct the flow of the fresh air-fuel mixture and to improve scavenging, i.e., pushing exhausted gas out of the cylinder. Here, squish zone **408** is a surface area raised from surface **402** and matches the inside surface **204** (FIGS. **9** and **10**) of housing body **202**. This raised surface creates higher pressures around the extended edges of combustion surface **402**.

[0070] Squish zone **408** may create turbulence by compressing the air-fuel mixture in the zone as the mixture reaches full compression over central combustion region **402**. This may allow more complete burning of the gaseous mixture to decrease emissions. The squish zone also may improve exhausting of the remaining burnt gases. The surface of the squish zone may be 0.010 in. to 0.080 in. (0.25 mm to 2 mm)

(metric equivalents are approximations) above combustion surface **402** with 0.020 in. to 0.060 in. (0.5 mm to 1.5 mm) possibly preferred.

[0071] The hot end of spark plug **520** (FIG. 4) in mount **522** extends toward chamber **360** such that spark from the spark plug can ignite the fuel. High-pressure, direct injectors may be installed into housing **202** in close proximity to the spark plug for gasoline direct injection. The hot end of the spark plug may terminate in a recess **524** in inner wall **204** of housing body **202** (FIG. 9). The recess is shown as cylindrical, but could be sized and shaped to improve combustion. The drawing show a single spark plug, but having two or more plugs for each combustion chamber may improve operation. In addition, a spark plug is shown in the drawings, but the rotary motor could work using the diesel cycle at higher pressures and without a spark plug. Those higher pressures may require different materials or different dimensions for the rotary engine's components.

[0072] The spark plug fires at a predetermined time for proper engine timing. The ignition of the fuel in the presence of air in chamber **360** causes a substantial increase in pressure in the chamber. That pressure applies a force on rocker **376** to force the rocker inward. As rotor **310** continues rotating, what had been chamber **360** rotates into the position of chamber **362** in FIG. 5. This is a movement from the compression of the chamber to the power from the chamber. Thus, rocker **370** pivots to its inward position. (FIG. 5)

[0073] Through the connection of outer crankshaft tang **436** with tang receiver **448**, the inward movement rotates outer crankshaft **442**. As a result, spur gears **450** and **456** rotate and travel along the outside of ring gears **620** and **622** (FIGS. 3 and 5). This, in turn, causes rotor **310** to rotate.

[0074] Continued rotation of rotor **310** positions the chamber in question to the position of chamber **364** in FIG. 5. During this rotor rotation, the spur gears associated with the rocker (now rocker **372**) act on the link between the outer crankshaft and the rocker to pivot the rocker outward. The outward pivoting pushes exhaust gases through exhaust port **516** (FIGS. 2, 9 and 10). The cycle then repeats itself.

[0075] During each revolution of rotor **310**, each of the four chambers sequence through four cycles: intake, compression, combustion and exhaust. By choosing the offset pivot of the rocker link, e.g., link **418** relative to its outer crankshaft **436** and to its rocker **376** (FIG. 7) and the position of its pivot pin **380**, the engine can modify the timing of the intake, compression, combustion and exhaust cycles. Because the rocker's pivot is stationary, the pivot also may create an arc-shaped offset angle. For example, the rockers can have longer power and intake cycles than their compression and exhaust cycles. Those cycles may be as follows: intake = 100°, compression = 80°, combustion = 100° and exhaust = 80°. This overlap could allow each combustion cycle to fire 20° before the previous chamber has finished its power cycle. This overlap function may allow smoother transitions between power cycles.

[0076] In addition, the intake and exhaust ports **514** and **516** (FIGS. 9 and 10) may overlap so that new air and fuel enter the combustion chamber through the intake port as it opens and before the exhaust port is completely closed-off. This may allow a small rush of new air-fuel mixture to push out the remaining exhaust gases drawing in a completely new charge of fuel and air. The intake/exhaust overlap may be from 4° to 24°, and preferably may be 8°.

[0077] Note that only the outer crankshaft positioned with the rocker moving from combustion-caused expansion receives power directly from that combustion-caused pressure acting on the rocker. Through rotation of that outer crankshaft's spur gear acting on ring gears **620** and **622**, rotor **310** rotates. At the same time, continued rotation of the rotor causes the spur gears for the other three outer crankshafts to rotate, which, in turn pivots the rocker associated with the crankshaft to pivot in or out. However, as each spur gear moves to the power/combustion position where the air-fuel mixture ignites, expanding gases drive the rotor inward. Consequently, that set of spur gears become the driving gears, and the other spur gears become driven gears.

[0078] The rear face of front ring plate **396** and the front face of rear ring plate **398** are against the respective sides of rotor **310**. Each side of the rotor may have a sealing groove **530** that may run along the periphery of the arms. See FIGS. 5, 6a and 6b. Only groove **530** is visible in the drawings. Rotor seal cord may be installed in the sealing grooves on both sides of rotor to seal the arms to ring plates **396** and **398**.

[0079] Main crankshaft **610** extends through collar **248** (FIG. 1). If the rotary engine is used on a vehicle, the main crankshaft connects to the rest of the vehicle's drive train, e.g., transmission, clutch or other component. For non-vehicle uses for machines such as pumps and compressors, the crankshaft connects to the driven device. The main crankshaft also could be driven if the device is used as a compressor or pump. (See FIG. 19). The main crankshaft also may extend out either side or both sides of the housing.

[0080] Components may have channels and openings for coolant and lubricant. These are not explained in detail and may vary with different engine sizes and designs. However, see openings **346** and **348** (FIGS. 6a, 6b and 11), which could be used for cooling or lubrication. The arms also may have oil jets, e.g., jet **338** (FIG. 11) for providing lubrication in the chambers. These oil jets may be pressure or movement activated, allowing oil to pass only when desired. Other physically activated (pressure or movement) oil jets may be placed on various component parts, such as the front and rear plates **230** and **232** (FIG. 2) for controlled oiling of moving parts. Components and parts may have bushings or bearings (not shown) where needed for reducing friction, metal to metal contact protection, or holding desired tolerance specifications. Oil vacuum ports on the front and rear plates **230** and **232** (FIG. 2) may be placed at the lowest available gravitational oil collection area, depending on the physical mounting position of the engine, to extract oil away from moving parts. Parts also may have cutouts to decrease weight or provide better heat dissipation.

[0081] FIG. 4 shows some additional parts of the rotary engine in a vehicle. The air intake system **110** may include air filter **112** on throttle body **114**, which connects to intake manifold **116**. Air from the intake system flows into intake chamber **366** (FIG. 5). Fuel injector **126** also is positioned near the intake chamber. The engine may be designed to burn different fuels, e.g., gasoline, ethanol, CNG, LNG, propane, or hydrogen. The fuel injector of such an engine could have separate outlets **128** and **130** for different fuels. Exhaust from chamber **364** passes into exhaust header **118** and into the remainder of the exhaust system. Starter motor **120** and alternator **122** and engine electronics in an electronic control unit **124** also attach to housing **200**.

[0082] The size of the engine compartment and the position of the rotary engine in the engine compartment may affect the

various components' locations insofar as they must fit in the compartment and may need to be accessible for service.

[0083] Belts or other connectors (not shown) may drive the alternator and other devices from engine power.

[0084] FIG. 13 shows a two-chambered rotor for a rotary engine. Rotor 550 rotates twice for each power engine power stroke. The rotor has two arms 552 and 554 that may be shaped as shown in FIG. 13. The arms form two opposite chambers 556 and 558. Rockers 560 and 562 mount on respective pins 564 and 566. Outer crankshafts (now shown) connect to rockers through linkage similar to that shown in FIG. 7. Each crankshaft may have spur gears (now shown) at the outer crankshaft end that protrude through bores 568 and 570 from the rotor. A main crankshaft (not shown) protrudes from center bore 572. Stationary ring gears (not shown) mount to stationary housing structure.

[0085] In one position in FIG. 13, the air-fuel mixture is injected or otherwise enters one of the chambers, e.g., chamber 556. As rotor 550 rotates, rocker 560 pivots outward to compress the air-fuel mixture until, at or close to full compression, a spark ignites the air and fuel. The rotor rotates without exhausting the exhaust gases until the rotor returns to its initial position, i.e., where chamber 556 is in FIG. 13. Valves (not shown) control intake and exhaust from chambers 556 and 558. One or more valves open to allow the air-fuel mixture to enter chamber 556, and then one or more different valves open to allow the exhaust gases to enter the exhaust system.

[0086] The rotary engine that has been described is a four-stroke engine, intake, compression, combustion and exhaust. In a four-stroke piston engine, those strokes occur every two rotations of the crankshaft. Two-stroke piston engines complete a cycle in two movements of the piston, in and out. The rotary engine could be modified into a two-stroke engine. Two- and four-stroke designs have advantages and drawbacks relative to each other.

[0087] A typical use of internal combustion engines is in vehicles. Just as piston engines come in different sizes, compressions, power rating and other factors for different vehicles, the rotary engine's specifications can vary. Insofar as the rotary engine powers generators, pumps, machinery or other devices, the engine may have different designs. Some might require higher speed but less low-speed torque. Other application may require high torque at low speed. Some application may require constant output over long periods. Adjusting the combustion chamber volume, the size and pivoting angle of the rockers and other factor of the rotary engine may be modified to satisfy an engine's requirements.

[0088] At least two ways allow matching output power to power needs. The first is to have larger combustion chambers with larger rockers. Increasing the diameter of rotor 310 may allow the rockers to pivot through a larger angle to increase displacement. Likewise, increasing the width of the rotor also increases the displacement of each chamber. Optimizing performance may require balancing the effect of increasing the rotor's diameter and width. For example, increasing dimensions weight of all components and may affect other engine components or engine symmetry.

[0089] Stacking two or more power modules along the main crankshaft also could combine the modules' power output. In addition, combinations of different sized power modules can be assembled into one unit.

[0090] FIG. 14 shows a duel unit 700 comprising a front unit 702 and rear unit 704. The front unit is bounded by front

plate 706 and center plate 710, and the rear unit is bounded by rear plate 708 and center plate 710. In FIG. 14, the locations where combustion occurs are on the same side of the housing, but they could mount 180° apart. Likewise, with more rotors for one engine, the location where combustion occurs could be spaced evenly around each housing, e.g., 120° apart for three rotors and 90° for four rotors.

[0091] Though the configuration just described are internal combustion engines, the device with modifications can become a compressor. Compressor 800 (FIG. 19) comprises housing body 802. Compressors may be free-standing. Therefore, the compressor may include base 804. The housing body has a cylindrical opening 806 in which a rotor (not shown) mounts for rotation. Front and rear housing plates (not shown; similar to plates 230 and 232 in FIG. 2) cover the rotor and cylindrical opening. Seals 810 and 812 may seal the housing plates to the housing body, and fasteners (not shown) extending through openings in the housing plates may attach to bores 808 in the housing body. The main crankshaft extends through the housing plates and connect to a separate motor or engine. When the device is used as a compressor, the main crankshaft is driven instead of providing the motive force.

[0092] Housing body 802 includes one or more inlets 820 and 824 and one or more outlets 826 and 828 (FIG. 19). These inlets and outlets could be used for high pressures such as for hydraulic pressurization. Valves may be provided for any inlets or outlets, and their construction and operation may depend on the fluid volume and pressure. Various bore such as bores 830, 832, 836 and 838 may be provided for fastening related devices, such as inlets and outlets for lubrication.

[0093] Rotor rotation causes the rockers to pivot in and out. The inlets are positioned to receive air, other gas or liquid ("fluid") either from the atmosphere in the case of air or from a source of fluid. The fluid flows into one of the rotor chambers as the rocker pivots inward to lower the pressure. When the rotor rotates away from the inlet, the rocker pivots outward to compress the fluid and force it through an outlet. With a four-chambered rotor, the rotor rotates to another inlet, draws fluid into the chamber and then compresses the fluid as the rotor moves adjacent another outlet.

[0094] Four strokes are not necessary. Thus, pressurized fluid can flow out an outlet at all compression strokes (pivoting outward of the rocker). Accordingly, the rotor could have two, four, six or more chambers with a corresponding number of rockers and outer crankshafts subject to space limitations.

[0095] FIG. 21 illustrates a rotor with eight chambers, which may be particularly useful as a heavy-duty diesel unit. Because FIG. 11 has reference numerals for its components, and FIG. 21 shows components with related functions, the description of FIG. 21's parts is abbreviated.

[0096] Rotor 910 has eight arms 912, 914, 916, 918, 920, 922, 924 and 926. Adjacent arms form eight chambers such as chamber 930 between arms 914 and 916 and chamber 923 between arms 916 and 918. The inner cylindrical wall (not shown) of the housing receiving rotor 910 forms the outside of each chamber. Rocker 934 mounts near the distal end of arm 916 and pivots in and out of chamber 930. It is shown in in FIG. 21. Similarly, rocker 936 mounts near the distal end of arm 918 and pivots in and out of chamber 932. FIG. 21 shows its outward position. the rotor also mounts six other rockers, which are not numbered.

[0097] The rotor is formed of front plate 940 and a corresponding rear plate, which is not visible in FIG. 21. Bores

such as bores **942** and **944** extend through the rotor's front plate, and corresponding and aligned bores (not shown) extend through the rear plate. Properly sized wheels mount in the bores, and spur gears mount to the wheels and extend out of the bores. FIG. **21** shows neither the wheels nor the spur gears. The drawing also does not show a ring gear mounted on a main crankshaft extending through central bore **946**. The spur gears engage the ring gear and rotate as the rotor rotates about its axis. Linkages between the wheels and the rockers cause the rockers to pivot in and out of their respective chambers as the rotor rotates. However, when fuel ignites in the chamber that is then the power chamber, force from the expanding gas on the rocker rotates the wheels and spur gear. That rotation acts on the ring gear to rotate the rotor.

**[0098]** The rotor may have additional bores such as bores **950** and **952** to decrease weight. The bores also may carry lubricant.

**[0099]** The outside of each arm that contacts or is close to contact with the cylindrical wall of the housing may have two grooves, e.g., grooves **958** and **960**, which receive seals (not shown). Other seals for sealing the chambers and the rotor itself are not shown.

**[0100]** In the eight-chamber version, the air-fuel mixture ignites simultaneously in two chambers on opposite sides of the housing. Thus, during each rotor rotation, each chamber completes eight cycles (intake, compression, power, exhaust, intake, compression, power, and exhaust). Engines with **12**, **16** or more chambers per rotor are contemplated. They may be particularly useful for large and heavy equipment such as earth movers, mining dump trucks, and cranes.

**[0101]** When detailed descriptions reference one or more drawing figures, the element being discussed is visible in that drawing. The element also may be visible in other figures. In addition, to avoid crowding of reference numerals, one drawing may not use a particular reference numeral where the same element is in another drawing with the reference numeral.

**[0102]** The description is illustrative and not limiting and is by way of example only. Although this application shows and describes examples, those having ordinary skill in the art will find it apparent that changes, modifications or alterations may be made. Many of the examples involve specific combinations of method acts or system elements, but those acts and those elements may be combined in other ways to accomplish the same objectives. With regard to flowcharts, additional and fewer steps may be taken, and the steps as shown may be combined or further refined to achieve the methods described. Acts, elements and features discussed only in connection with one embodiment are not intended to be excluded from a similar role in other embodiments.

**[0103]** "Plurality" means two or more. A "set" of items may include one or more of such items. The terms "comprising," "including," "carrying," "having," "containing," "involving," and the like in the written description or the claims are open-ended, i.e., each means, "including but not limited to." Only the transitional phrases "consisting of" and "consisting essentially of" are closed or semi-closed transitional phrases with respect to claims. The ordinal terms such as "first," "second," "third," etc., in the claims to modify a claim element do not by themselves connote any priority, precedence, or order of one claim element over another or the temporal order in which acts of a method are performed. Instead, they are used merely as labels to distinguish one claim element having a certain name from another element having a same name (but for use

of the ordinal term). Alternatives such as "or" include any combination of the listed items.

**1. A rotary device comprising:**

- a housing;
- a rotary module mounted for rotation in the housing, the rotary module comprising,
- a rotor;
- at least one rocker mounted for pivoting on the rotor, the rocker being operably connected to a first driver to rotate the first driver as the rocker pivots on the rotor;
- the first driver being operably connected to a second driver whereby rotation of the first driver causes the first driver to rotate about the second driver;
- at least one output member operably connected to the rotor rotating in response to rotation of the first driver about the second driver.

**2. A rotary engine comprising**

- a housing having an inner surface and front and rear enclosures enclosing the inside of the housing;
  - a rotor mounted for rotation in the housing, the rotor comprising at least one rocker, each rocker being mounted for pivoting on the rotor between an inside position spaced from the inner surface of the housing and an outside position adjacent the inner surface of the housing;
  - an outer crankshaft on the rotor operably connected to the rocker and rotating in response to rocker pivoting between the inside and outside positions, the outer crankshaft having a first driver rotating with rotation of the outer crankshaft;
  - a second driver operably connected to the housing and engaging the first driver whereby rotation of the outer crankshaft causes the first driver to travel about the second driver causing the rotor to rotate; and
  - a main crankshaft operably connect to the rotor and extending out of the housing, the main crankshaft rotating with the rotor.
- 3. The rotary engine of claim 2 wherein the first driver is a spur gear and the second driver is a gear.**

**4. The rotary engine of claim 2 wherein the rotor has an axis of rotation, the rotor comprising at least two arms extending outward from the axis of rotation, each rocker extending between two adjacent arms, each rocker having a first and second end opposite each other, a pivot pin at the first end of the rocker and attached to one arm, the adjacent arm having a surface that conforms to the path traveled by the second end of the rocker as it pivots about the pivot pin.**

**5. The rotary engine of claim 4 further comprising a seal located along the second end of the rocker, the seal being biased against the surface that conforms to the path traveled by the second end of the rocker.**

**6. The rotary engine of claim 2 wherein the rotor has an axis of rotation, the rotor comprising four arms extending outward from the axis of rotation and creating chambers between the respective arms, each rocker extending between two adjacent arms, each rocker having a first and second end opposite each other, a pivot pin at the first end of the rocker and attached to one arm, the adjacent arm having a surface that conforms to the path traveled by the second end of the rocker as it pivots about the pivot pin.**

**7. The rotary engine of claim 6 further comprising an inlet through the housing for injecting an air-fuel mixture into a chamber when the chamber is positioned adjacent the inlet.**

8. The rotary engine of claim 7 further comprising a spark plug through the housing for creating a spark in the housing for igniting an air-fuel mixture in the chamber containing the air-fuel mixture is positioned adjacent the spark plug.

9. The rotary engine of claim 6 further comprising a spark plug through the housing for creating a spark in the housing for igniting an air-fuel mixture when the chamber containing the air-fuel mixture is positioned such that the spark can ignite the air-fuel mixture.

9. (canceled)

10. The rotary engine of claim 2 wherein the rotor has an axis of rotation, the rotor comprising at least two arms extending outward from the axis of rotation, each arm have a thickness extending between two, spaced-apart sides, each outer crankshaft being mounted on an arm and extending adjacent the two, spaced-apart sides, the first driver extending outside the spaced-apart sides.

11. The rotary engine of claim 2 wherein each rocker has a surface facing the inner surface of the housing, the surface having a central section and a squish section at least partially around the central section and having a surface raised from the central section.

12. The rotary engine of claim 2 wherein each rocker has a groove extending at least partially around the rocker and a sealing member seated in the groove.

13. A rotary engine comprising:

a housing having a main housing having a generally cylindrical inner surface, a front and rear, a front plate covering the front of the housing and a rear plate covering the rear of the housing;

a rotor in the main housing between the front plate and rear plate and mounted for rotation, the rotor having an axis of rotation near the center of the rotor and a periphery around the center of the rotor, the periphery being adjacent the inner surface of the main housing;

the rotor comprising a plurality of spaced-apart arms extending outward about the axis of rotation adjacent the periphery, the space between adjacent, spaced-apart arms and the cylindrical inner surface of the housing forming a chamber;

a rocker mounted in each chamber, each rocker having a pivot pin at a first end of the rocker, the rocker pivoting about the pivot pin into and out of the chamber, the rocker pivoting toward and away from the inner surface of the main housing whereby the rocker compresses any gas in the chamber when it pivots toward the inner surface of the main housing;

an outer crankshaft operably attached to the rocker and mounted between the spaced-apart arms of one arm forming the chamber for the rocker, a link between each outer crankshaft and its rocker, the outer crankshaft rotating with pivoting of the rocker;

a drive member rotating in response to rotation of the outer crankshaft and a driven member fixed relative to the housing, the drive member engaging the driven member such that the drive member moves along the driven member, whereby the movement of the drive member along the driven member rotates the rotor.

14. The rotary engine of claim 13 wherein the drive member is a spur gear and the driven member is a gear.

15. The rotary engine of claim 13 wherein the rotor has an axis of rotation, each rocker extending between two adjacent arms, each rocker having a first and second end opposite each other, a pivot pin at the first end of the rocker and attached to

one arm, the adjacent arm having a surface that conforms to the path traveled by the second end of the rocker as it pivots about the pivot pin.

16. The rotary engine of claim 15 further comprising a seal located along the second end of the rocker, the seal being biased against the surface that conforms to the path traveled by the second end of the rocker.

17. The rotary engine of claim 13 wherein the rotor has an axis of rotation, the rotor comprising four arms extending outward from the axis of rotation, each rocker extending between two adjacent arms, each rocker having a first and second end opposite each other, a pivot pin at the first end of the rocker and attached to one arm, the adjacent arm having a surface that conforms to the path traveled by the second end of the rocker as it pivots about the pivot pin.

18. The rotary engine of claim 17 further comprising an inlet through the housing for injecting an air-fuel mixture into a chamber when the chamber is positioned adjacent the inlet.

19. The rotary engine of claim 18 further comprising a spark plug through the housing for creating a spark in the housing for igniting an air-fuel mixture when a chamber with an air-fuel mixture is positioned adjacent the spark plug.

20. The rotary engine of claim 17 further comprising a spark plug through the housing for creating a spark in the housing for igniting an air-fuel mixture when a chamber with an air-fuel mixture is positioned adjacent the spark plug, the rocker in the chamber moving toward the housing to compress an air-fuel mixture before the spark plug ignites the air-fuel mixture in the chamber with the air-fuel mixture.

21. The rotary engine of claim 13 wherein the rotor has an axis of rotation, the rotor comprising at least two arms extending outward from the axis of rotation, each arm have a thickness extending between two, spaced-apart sides, each outer crankshaft being mounted on an arm and extending adjacent the two, spaced-apart sides, the driver extending outside the spaced-apart sides.

22. The rotary engine of claim 13 wherein each rocker has a surface facing the inner surface of the housing, the surface having a central section and a squish section at least partially around the central section and having a surface raised from the central section.

23. The rotary engine of claim 13 wherein each rocker has a groove extending at least partially around the rocker and a sealing member seated in the groove.

24. A compressor for compressing fluid comprising:

a housing having a main housing having a generally cylindrical inner surface, a front and rear, a front plate covering the front of the housing and a rear plate covering the rear of the housing;

a rotor in the main housing between the front plate and rear plate and mounted for rotation, the rotor having an axis of rotation near the center of the rotor and a periphery around the center of the rotor, the periphery being adjacent the inner surface of the main housing;

the rotor comprising a plurality of spaced-apart arms and the inside surface of the housing extending outward about the axis of rotation adjacent the periphery, the space between adjacent, spaced-apart arms and the cylindrical inner surface of the housing forming a chamber;

a rocker mounted in each chamber, each rocker having a pivot pin at a first end of the rocker, the rocker pivoting about the pivot pin into and out of the chamber, the rocker pivoting toward and away from the inner surface of the main housing whereby the rocker compresses any

gas in the chamber when it pivots toward the inner surface of the main housing;  
an outer crankshaft operably attached to the rocker and mounted between the spaced-apart arms of one arm forming the chamber for the rocker, a link between each outer crankshaft and its rocker, the outer crankshaft rotating with pivoting of the rocker;  
a drive member rotating in response to rotation of the outer crankshaft and a driven member fixed relative to the housing, the drive member engaging the driven member such that the drive member moves along the driven member, whereby the movement of the drive member along the driven member rotates the rotor; and

an outlet through the housing through which compressed fluid flows from compression of a rocker moving toward the inside surface of the housing.

**25.** The rotary engine of claim **6** further comprising a spark plug through the housing for creating a spark in the housing for igniting an air/fuel mixture containing the air-fuel mixture is positioned such that the spark can ignite the air-fuel mixture, the rocker in the chamber moving toward the housing to compress an air-fuel mixture before the spark plug ignites the air-fuel mixture in the chamber containing the air-fuel mixture.

\* \* \* \* \*